



### A compact, contemporary designed customer display unit


The clean and compact contemporary design of the **OCD 300** customer display unit is in perfect harmony with the spirit of AURES till systems.

Fitting any sales counter, the peripheral can be tilted (0°- 90°), making it very adaptable and saving essential space.

Its multilingual high-quality graphic display (*LED backlighting – two 20-character display lines*) is an advantage.

It has a single, integrated USB cable for both power supply and data transmission.

- ⊕ Compact till point design
- ⊕ 90° tilt angle
- ⊕ High-quality, extremely bright, multilingual graphic display
- ⊕ Single USB cable for data transmission and power supply
- ⊕ ESC/POS compatible
- ⊕ Serial port emulation

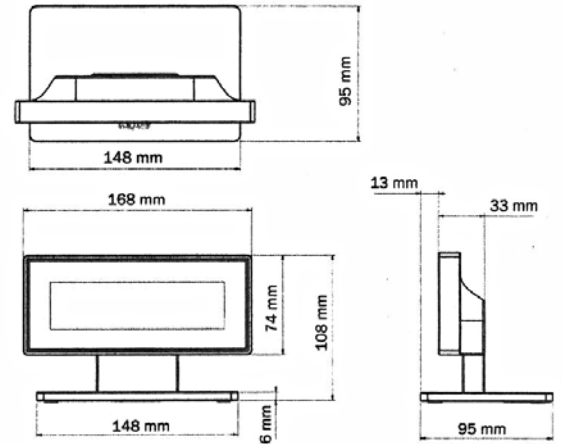

## MODEL

## OCD 300

Display mode	White LED backlighting FSTN negative transmissive LCD
Display colour	white /black
Number of characters	40 characters (2 lines x 20 characters)
Character matrix	12 x 32 points
Character size	6.33 mm x 16.93 mm
Character type	96 alphanumeric characters 28 international fonts
Brightness	700 cd/m <sup>2</sup>
Power supply	+5 V via USB plug
Electricity consumption	0.3 W
Reliability Centered Maintenance (RCM)	50,000 operating hours
Display panel dimensions	130.2 mm (width) x 37.6 mm (height)
Angles of view	30°- 60° (vertical) Minus 45°- 45° (horizontal)
Tilt angle	0°- 90°
<b>E N V I R O N N E M E N T</b>	
Operating temperature	5 °C- 45 °C
Storage temperature	-10 °C - 55 °C
Dimensions (W x H x D)	148 x 108 x 95 mm (see drawing)
Weight	420 g